



GARAGE TILE

# THE STRONGEST FLOOR TILE

Extremely durable
Easy to clean and install
Withstand high point loads

+ 86 - 13166226647
www.junwaysports.com
anna@junwayflooring.com



#### 产品特点 Features

- ◆ 抗菌抗霉变
- ◆ 轻载荷,耐用有弹性,吸音减震

明扣铆钉 460

- ◆ 互锁结构,易于安装和拆卸
- ◆ 防滑设计,耐油耐酸碱腐蚀
- ◆ 无毒,日常清理简单.
- ◆ 适用场合小型车库,地下室,储藏室,厨房,展厅,商店等
- ◆ 保质期 10 年


#### Product Construction&Features

- Mold and mildew resistant
- light duty ,durable ,flexible ,sound absorption,shock absorption
- interlocking design ,easy to install and disassemble
- anti-slip,Oil,Acid ,alkali resistant
- non-poisonous, easy to maintenance and clean
- Be available for Small garages, basements, mudrooms, kitchens, Trade show, shopping room Etc.
- 10 years warranty

型号 Type:	MKMD460	
图案 Pattern:	圆点 Coin	
规格 Size:	460x460mm	
厚度 Thickness:	4.5mm	
材料 Material:	PVC	
重量 Weight:	1kg	
硬度 Hardness:	90±5° (Shore A)	

# 产品细节 product details



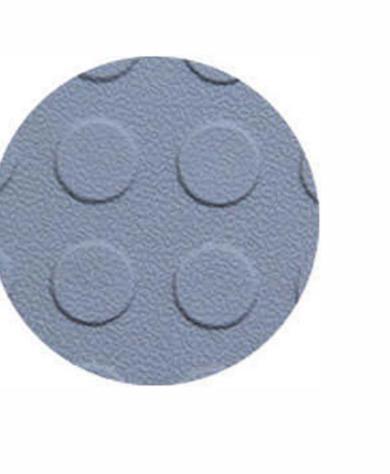

背面 back side



### 配套边条和转角 edge and corner

size:460mm\*70mm

size:512mm\*70mm

# 明扣皮纹 460

#### 产品特点 Features

- ◆ 抗菌抗霉变
- ◆ 轻载荷,耐用有弹性,吸音减震
- ◆ 互锁结构,易于安装和拆卸
- ◆ 防滑设计,耐油耐酸碱腐蚀
- ◆ 无毒,日常清理简单.
- ◆ 适用场合小型车库,地下室,储藏室,厨房,展厅,商店等
- ◆ 保质期 10 年

#### Product Construction&Features


- Mold and mildew resistant
- light duty ,durable ,flexible ,sound absorption,shock absorption
- interlocking design ,easy to install and disassemble
- anti-slip,Oil,Acid ,alkali resistant
- non-poisonous,easy to maintenance and clean
- Be available for Small garages,basements, mudrooms, kitchens, Trade show, shopping room Etc.
- 10 years warranty

边条和垫子拼合效果


#### MKPW460 型号 Type: 皮纹 smooth textured 图案 Pattern: 460x460mm 规格 Size: 厚度 Thickness: 材料 Material: 重量 Weight: 90±5° (Shore A) 硬度 Hardness:

#### 正面 front side




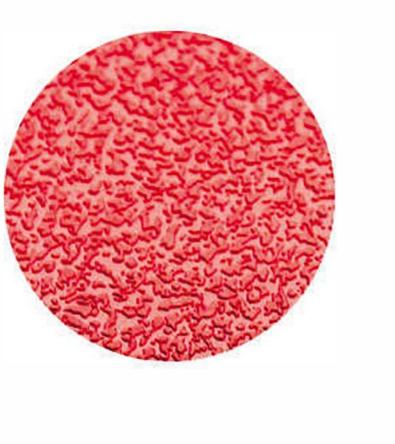

#### 背面 back side

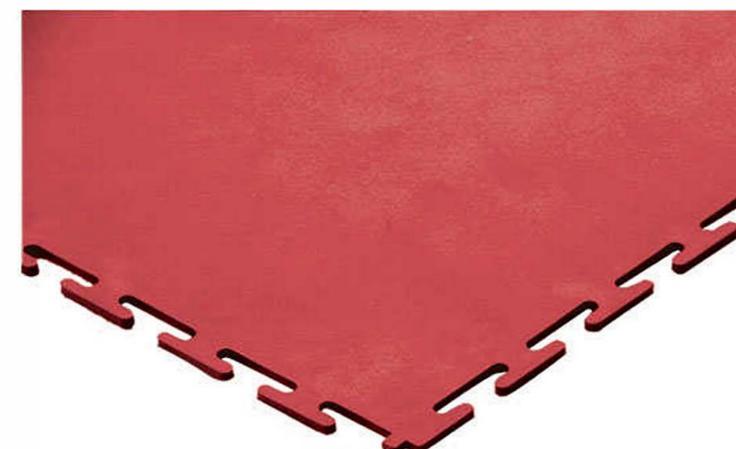



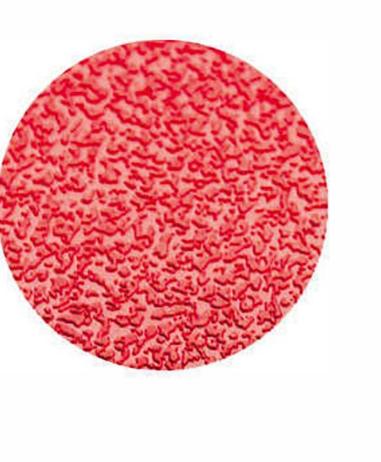










# 明扣皮纹 500



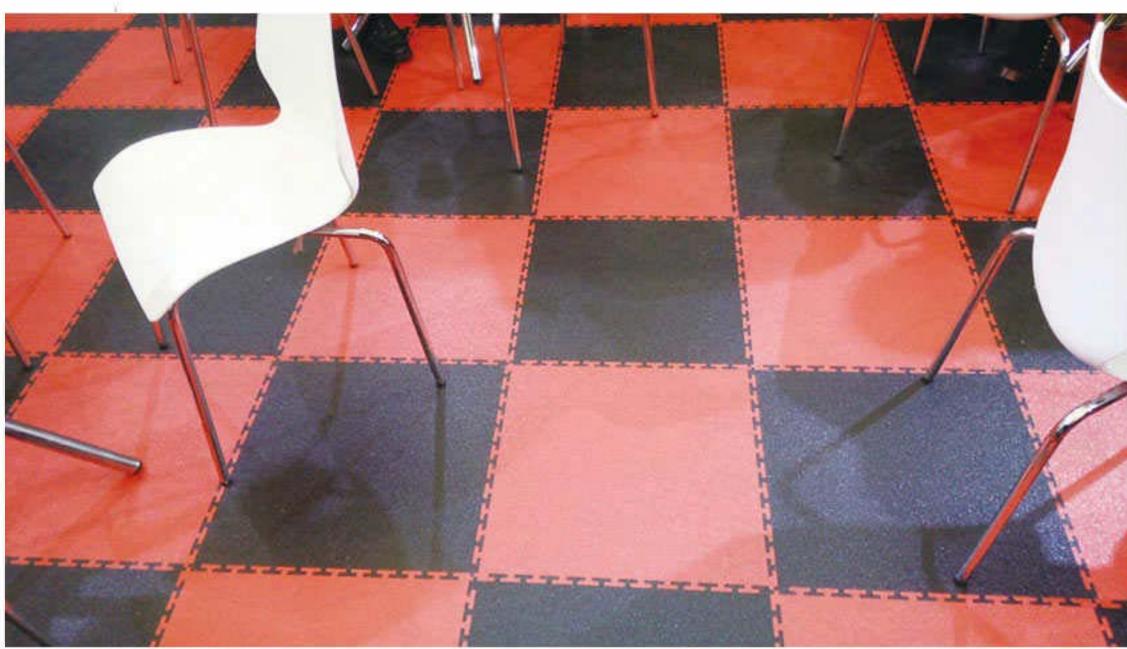




## 产品特点 Features

- ◆抗菌抗霉变
- ◆ 重载荷,耐用有弹性,吸音减震
- ◆ 互锁结构,易于安装和拆卸
- ◆ 防滑设计,耐油耐酸碱腐蚀
- ◆ 无毒,日常清理简单。
- ◆ 适用于汽修厂,车间,工厂,大型仓库,停车场,展厅,商店等
- ◆ 保质期 10 年

#### Product Construction&Features


- Mold and mildew resistant
- heavy duty ,durable ,flexible ,sound absorption,shock absorption
- interlocking design ,easy to install and disassemble
- anti-slip,Oil,Acid ,alkali resistant
- non-poisonous, easy to maintenance and clean
- Be available for auto repair facilities, work shops, factories, big warehouse, big garages, Trade show, shopping room Etc.
- 10 years warranty


型号 Type:	MKPW500
图案 Pattern:	皮纹 smooth textured
规格 Size:	500x500mm
厚度 Thickness:	6.5mm
材料 Material:	PVC
重量 Weight:	1.7kg
硬度 Hardness:	90±5° (Shore A)

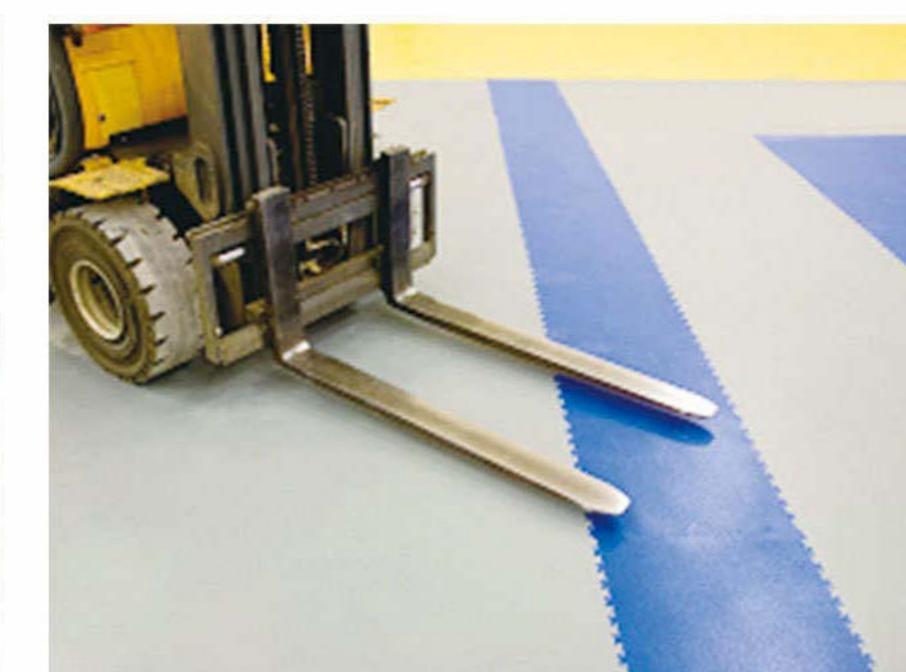



正面 front side

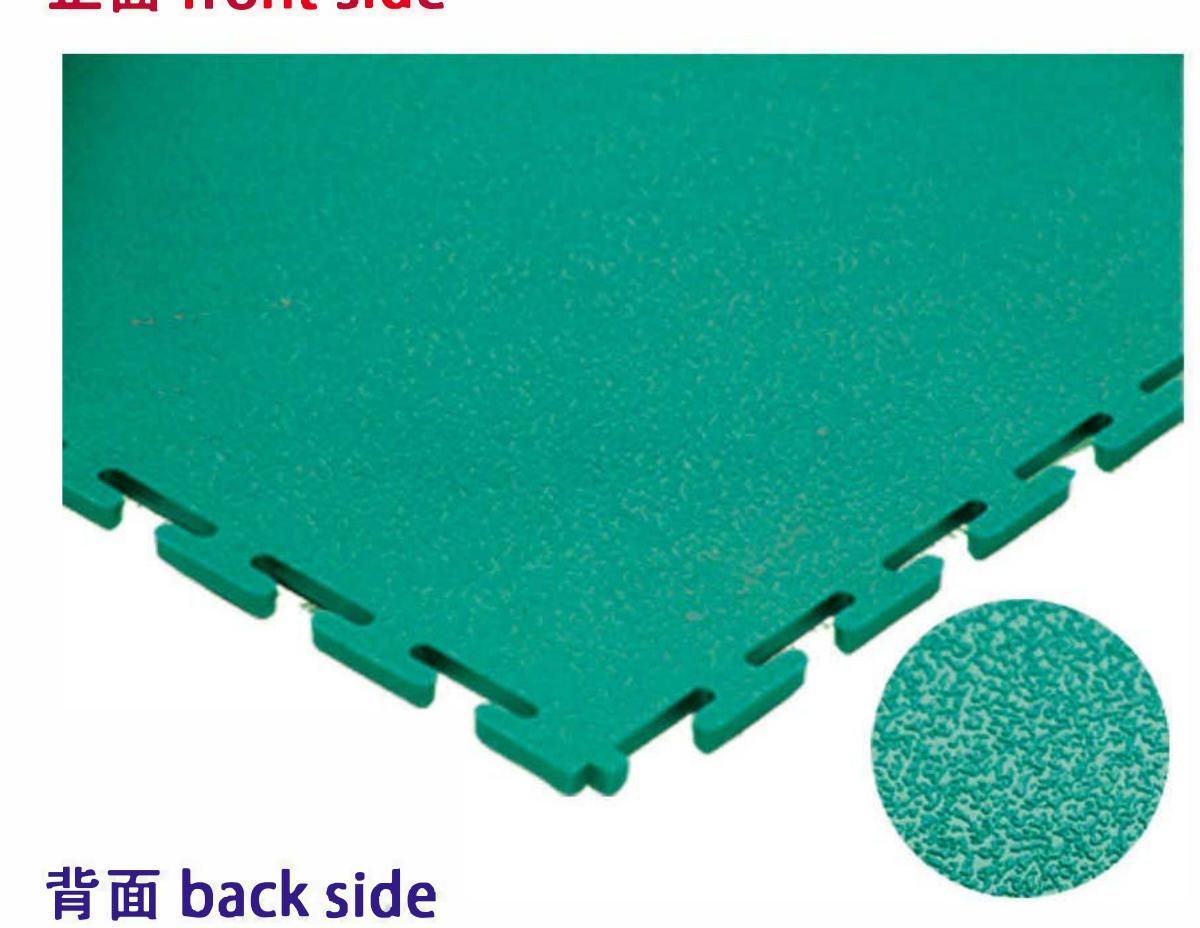


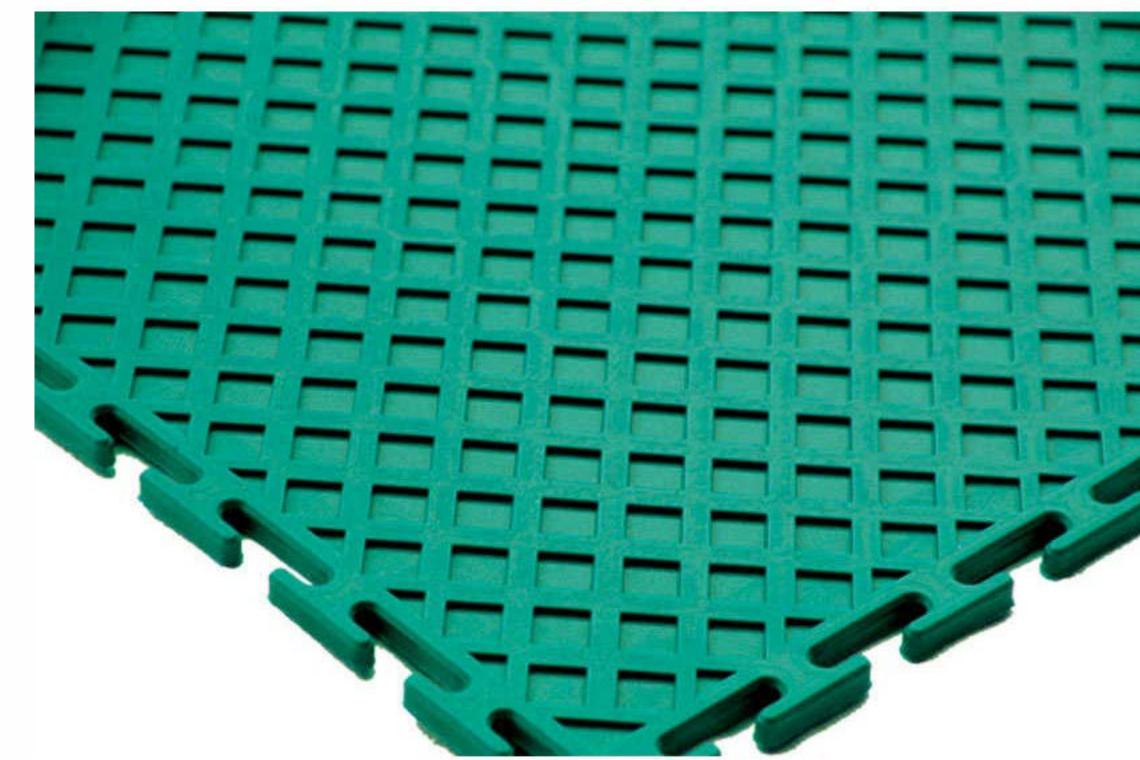





# 明扣铆钉500



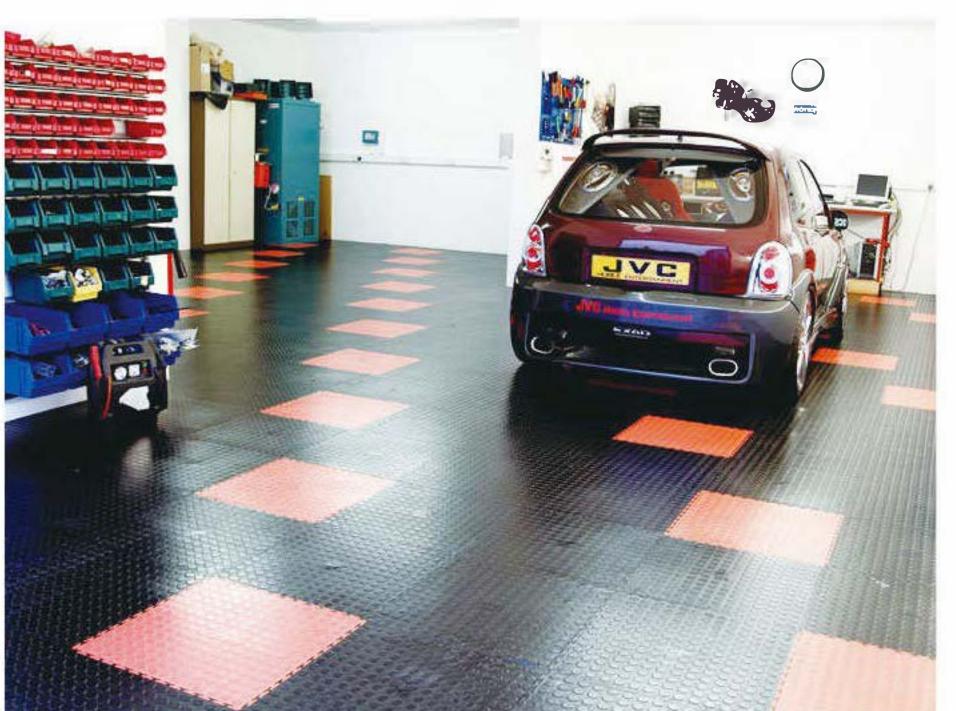

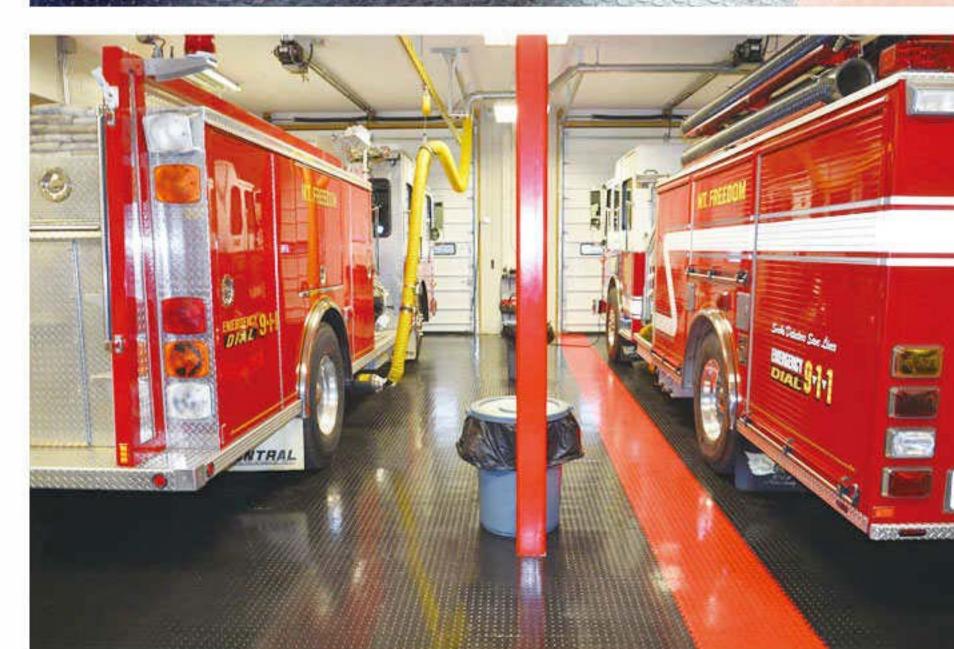



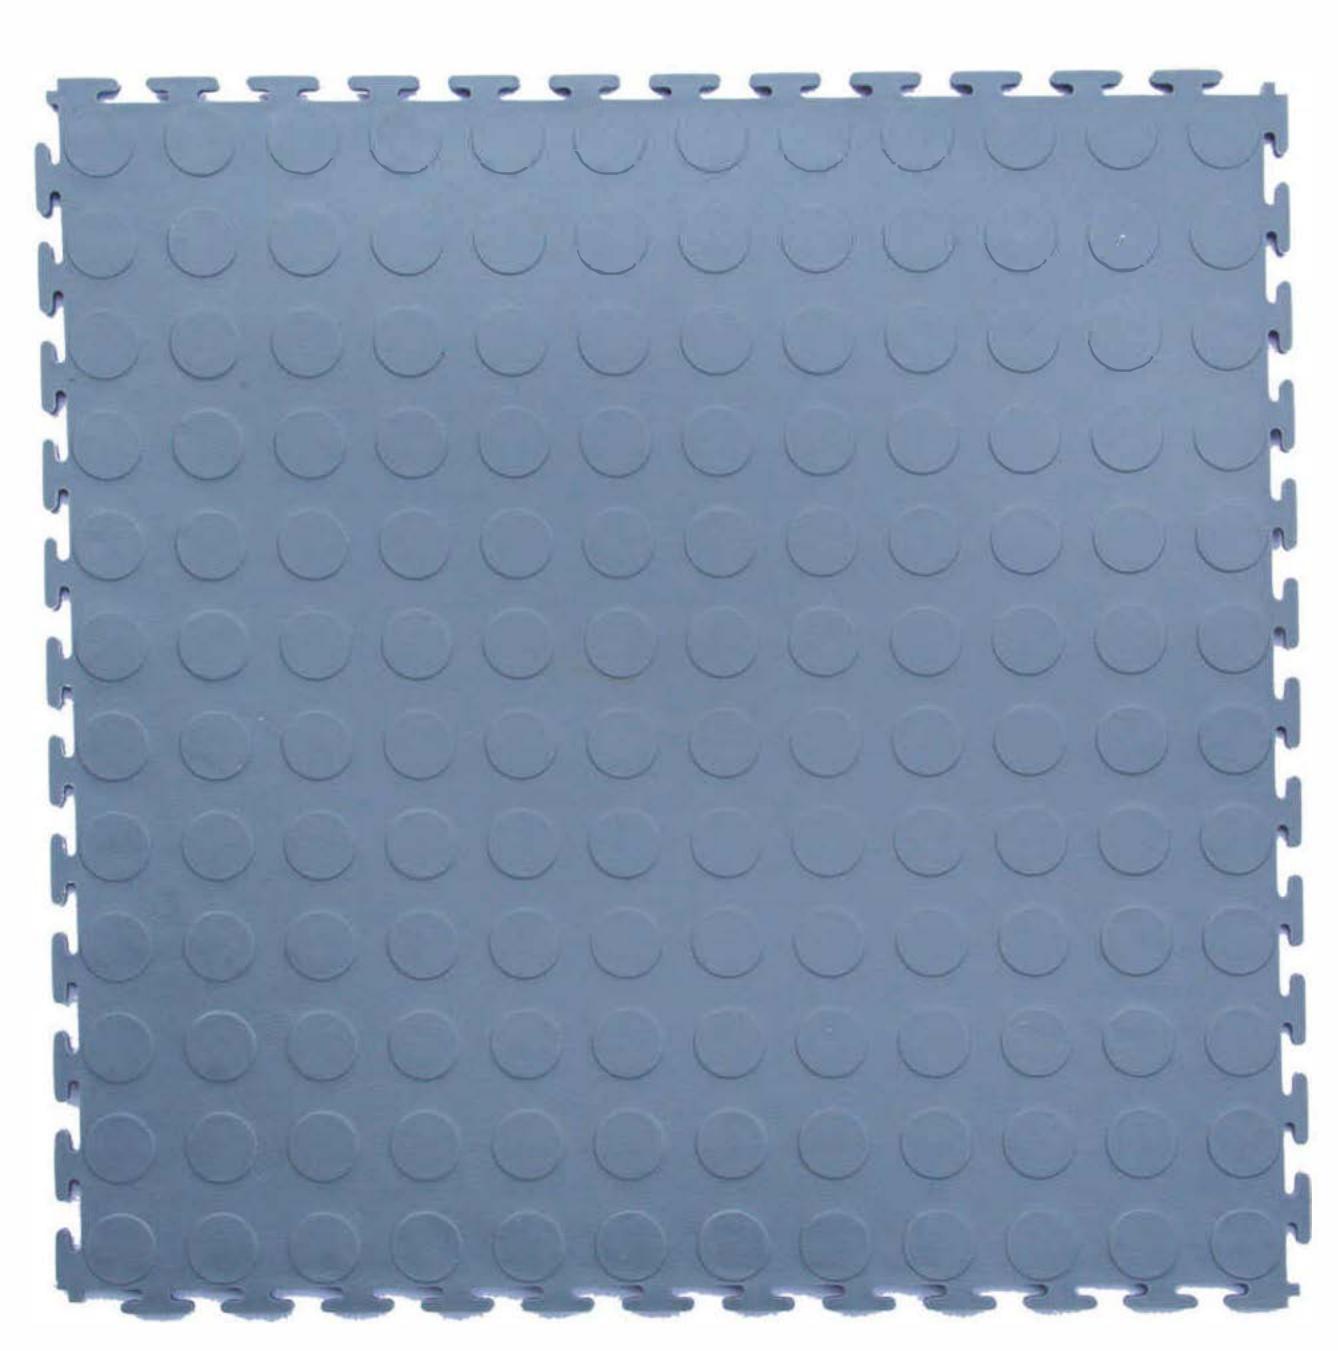

型号 Type:	MKMD500
图案 Pattern:	圆点 Coin
规格 Size:	500x500mm
厚度 Thickness:	7mm
材料 Material:	PVC
重量 Weight:	1.8kg
硬度 Hardness:	90±5° (Shore A)

## 产品细节 product details







size:550mm\*120mm

size:120mm\*100mm



# 暗扣皮纹 500 暗扣铆钉 500


## 产品特点 Features

- ◆抗菌抗霉变
- ◆ 重载荷,耐用有弹性,吸音减震
- ◆ 互锁结构,易于安装和拆卸
- ◆ 防滑设计,耐油耐酸碱腐蚀
- ◆ 无毒,日常清理简单。
- ◆ 适用于汽修厂,车间,工厂,大型仓库,停车场,展厅,商店等
- ◆ 保质期 10 年

#### Product Construction&Features


- Mold and mildew resistant
- heavy duty ,durable ,flexible ,sound absorption,shock absorption
- interlocking design ,easy to install and disassemble
- anti-slip,Oil,Acid ,alkali resistant
- non-poisonous, easy to maintenance and clean
- Be available for auto repair facilities, work shops, factories, big warehouse,big garages, Trade show,shopping room Etc.
- 10 years warranty

## 产品细节 product details

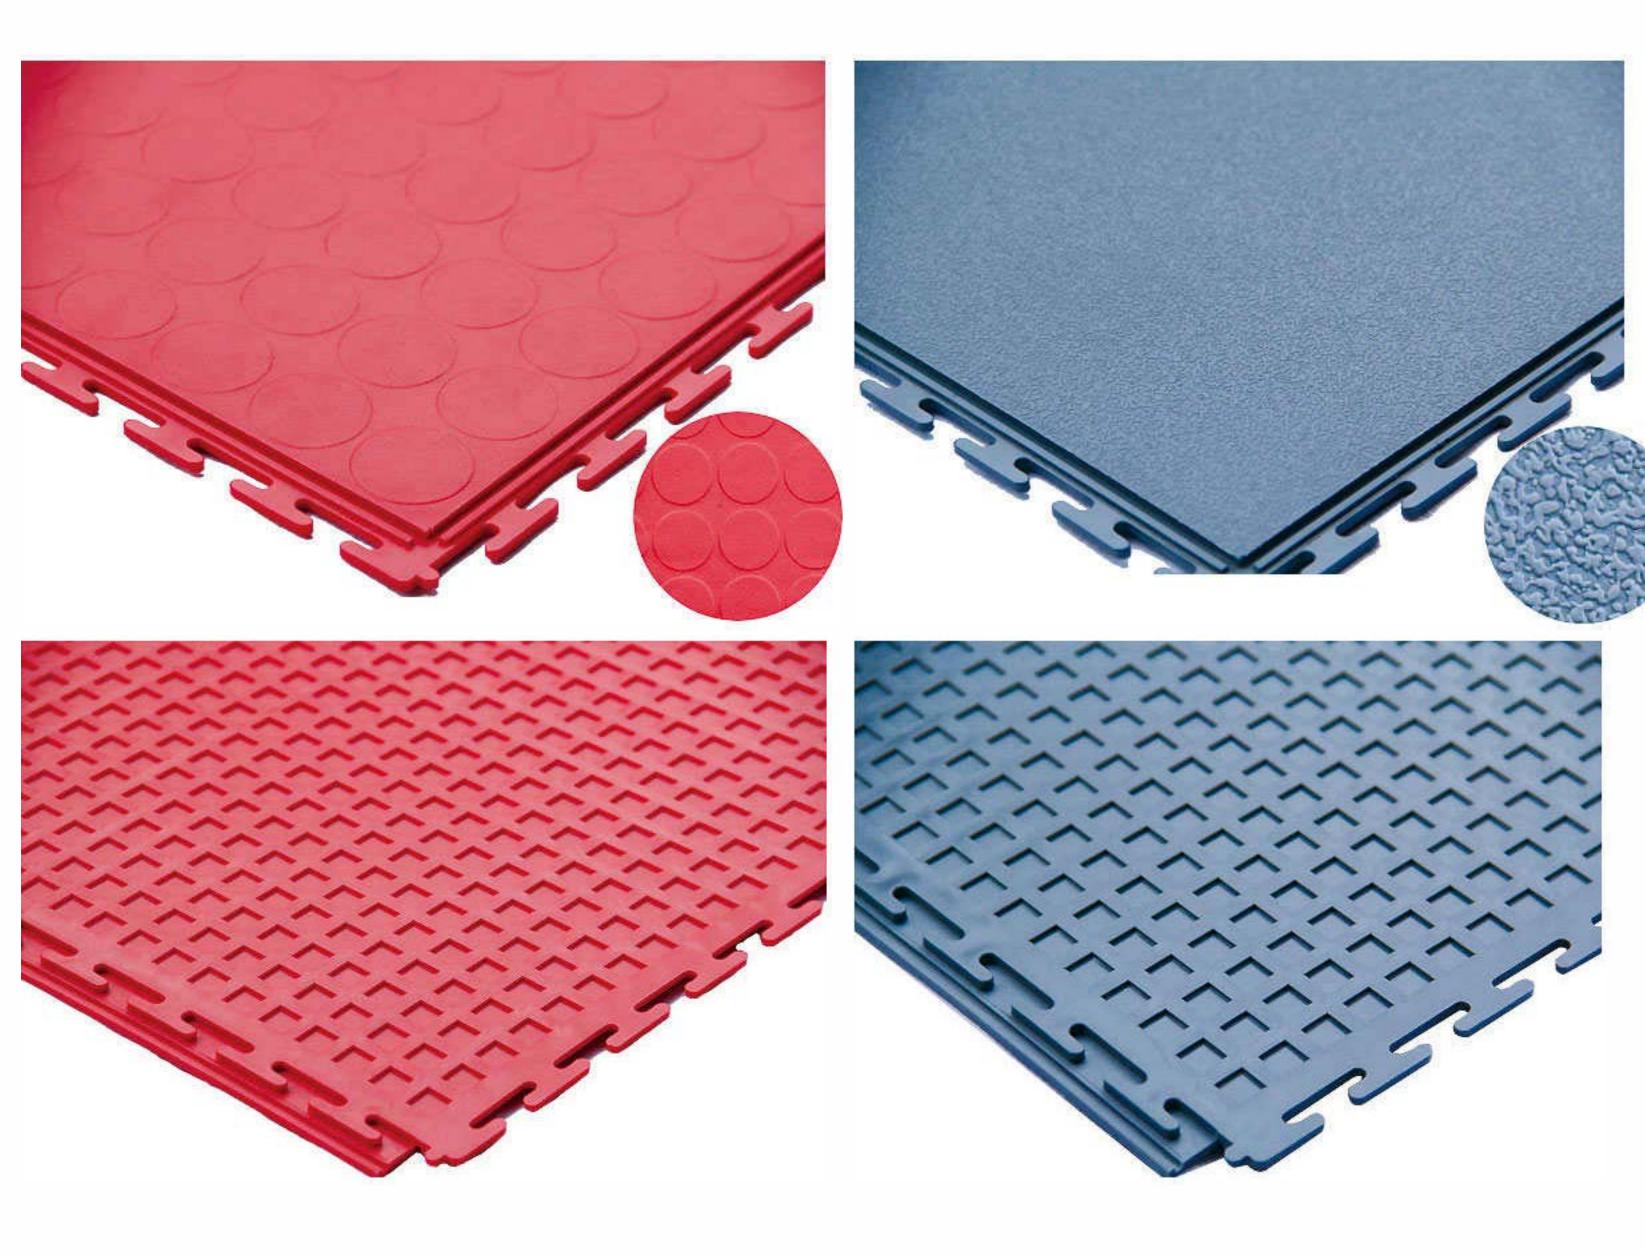

型号 Type:	AKMD500
图案 Pattern:	圆点 Coin
规格 Size:	505x505mm
厚度 Thickness:	7mm
材料 Material:	PVC
重量 Weight:	1.85kg
硬度 Hardness:	90 ± 5° (Shore A)

型号 Type:	AKPW500
图案 Pattern:	皮纹 Smooth textured
规格 Size:	505x505mm
厚度 Thickness:	6.5mm
材料 Material:	PVC
重量 Weight:	1.8kg
硬度 Hardness:	90±5° (Shore A)

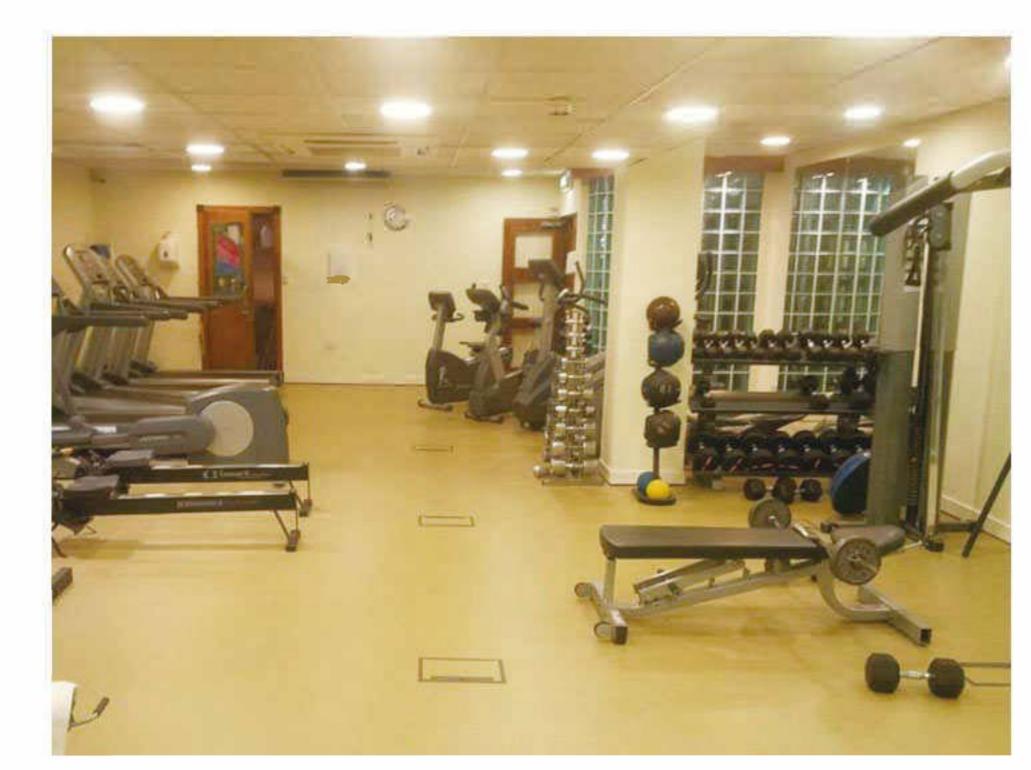








# 明扣钢板纹500

型号 Type:	MKGB500
图案 Pattern:	钢板纹 Diamond
规格 Size:	510x510mm
厚度 Thickness:	5.5mm
材料 Material:	PVC
重量 Weight:	1.5kg
硬度 Hardness:	90±5° (Shore A)

## 产品细节 product details

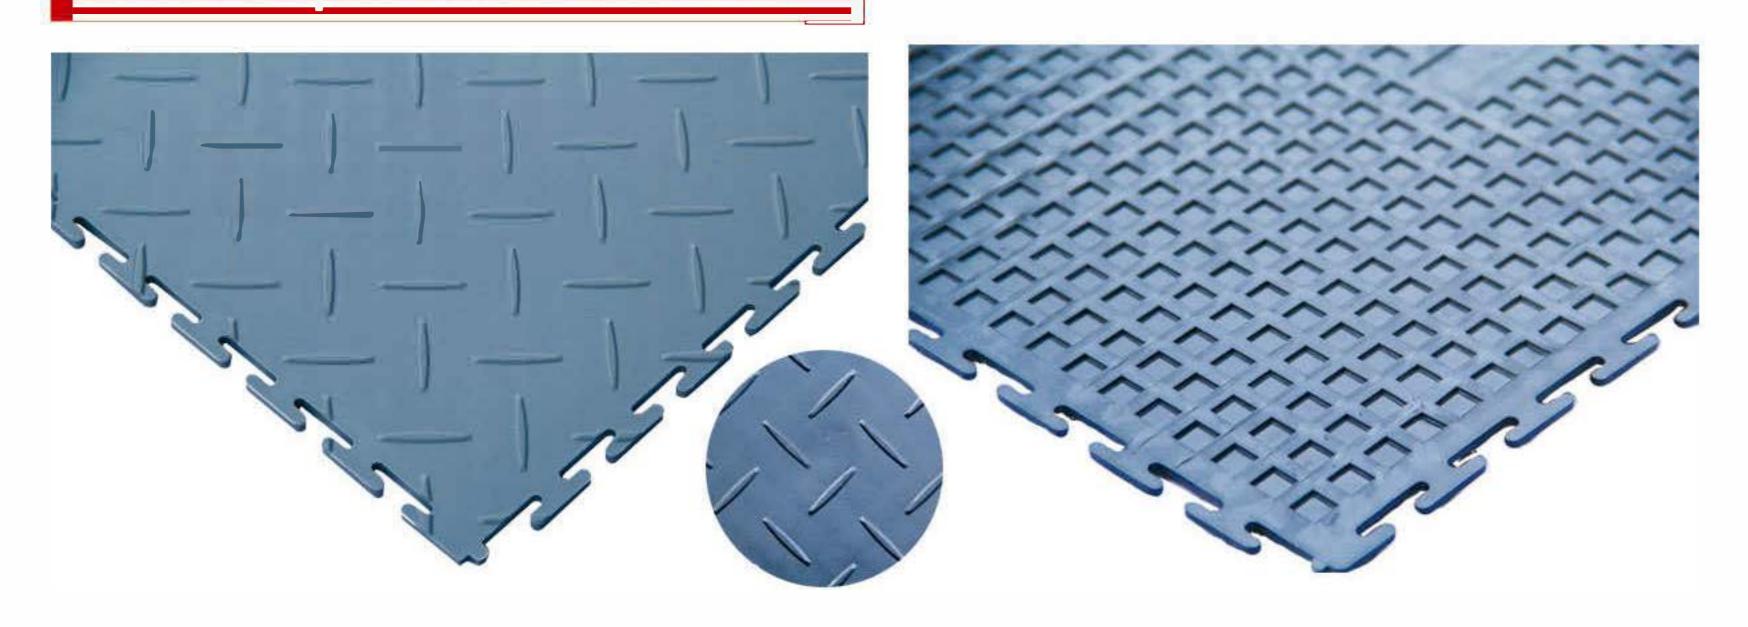








## 可选颜色 Available colors

黑色,深灰色,浅灰色,蓝色,绿色,黄色,白色等

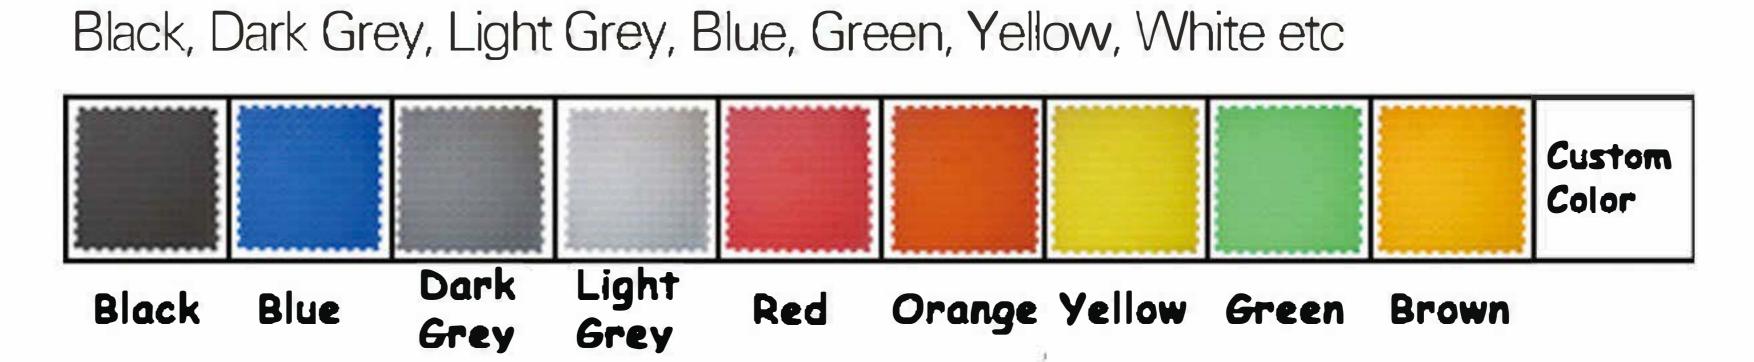

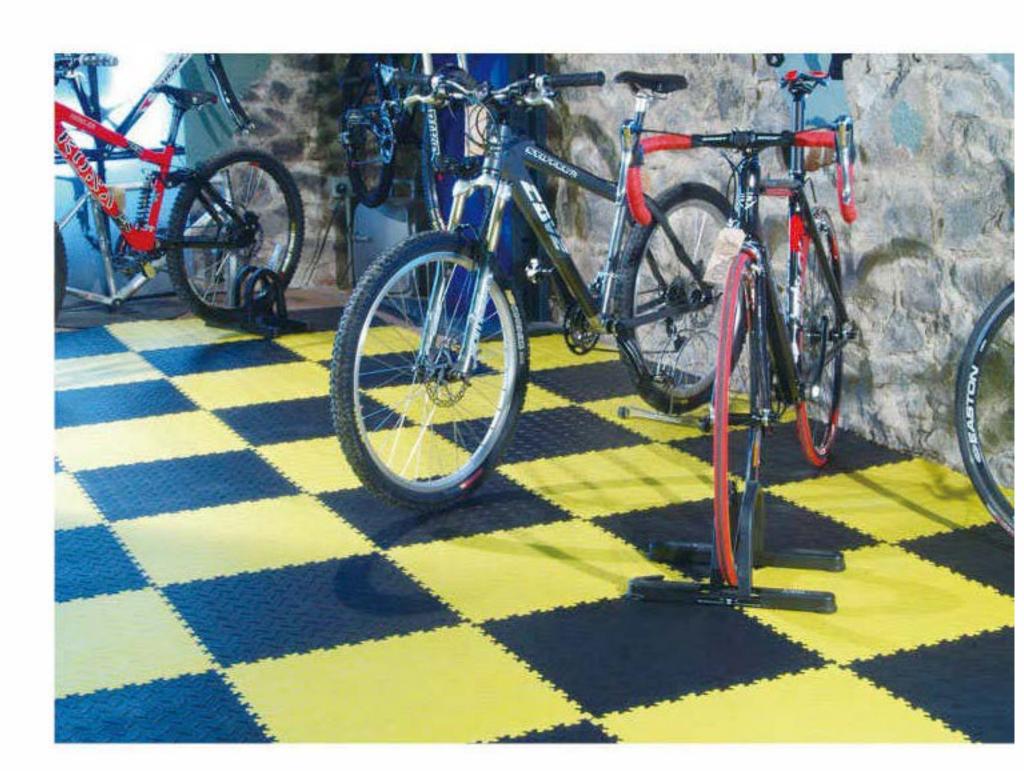



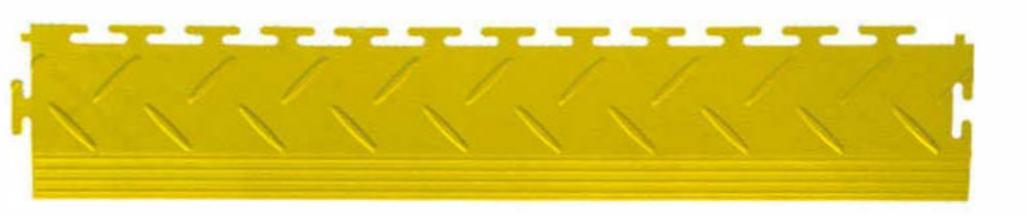

size:510mm\*95mm



# 安裝说明 FITTING INSTRUCTION

#### 准备工作:

在准备安装前,最好能在室内放置12小时以上,这是为了地垫能更好的适应环境,

用清扫工具清理地面上的灰尘和杂物.

卷尺,美工刀,橡胶锤,记号笔,角尺

安装过程:

1,测量室内面积

2,标记中心点位置,这个作为安装的起始点.

- 3,大概计算下到墙边位置需要多少片地垫.
- 4,穿过中心点,沿着最长边标记起始线.保证这条线和墙壁平行.
- 5,从中间位置开始铺设地垫,在拼合之前,建议平放地面,看下到墙壁需要几片.是不是需要裁剪.
- 6,用橡胶锤敲击拼装.
- 7,如果到墙壁不够整片地垫,用美工刀切开即可.
- 8,在使用之前建议通风晾至24小时以上.

#### Prepartion:


We recommend that Tiles are placed into the room where they are to be fitted for 12 hours prior to installation. This allows the tiles to acclimatize to their environment. Brush the existing floor to make sure the floor is clean of dust and dirt.


#### Tools:


1, Measuring Tape 2, Art knife 3, Rubber Mallet 4, Marker 5, Angle Rule Installation

- 1, Measure the length & width of the room
- 2, Locate & mark the centre of the room This is the approximate starting point for the installation
- 3,Check the number of tiles required to reach the walls in each direction. Remember you can cut the tiles to fit.
- 4,Draw a chalk-line through the start point parallel to the longest dimension. This is to act as a guide for keeping tiles parallel to the walls. To ensure the line is parallel to the walls,
- 5, Starting from the middle of the room begin to lay the tiles. It is advisable to set the tiles down first lay them out on the floor before you proceed to fit them together
- 6, Using the rubber mallet, tap the tiles together
- 7, Cut tile to piece if the size is not enough to the wall
- 8, Once all the full tiles have been laid it is advisable to wait approximately 24 hours before finishing the edge sections.




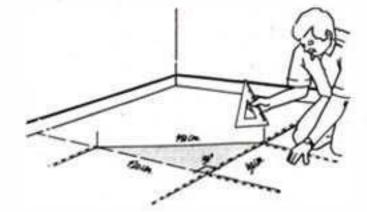


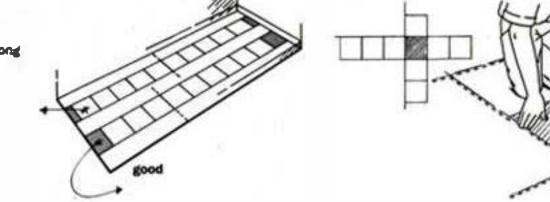

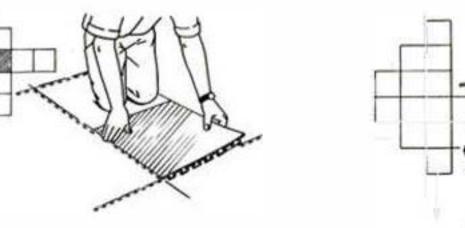



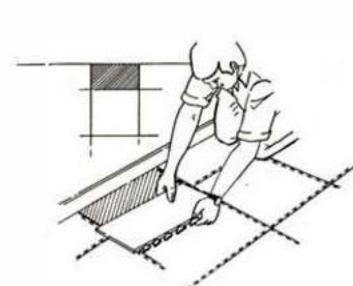





# 实例展示 Examples show





















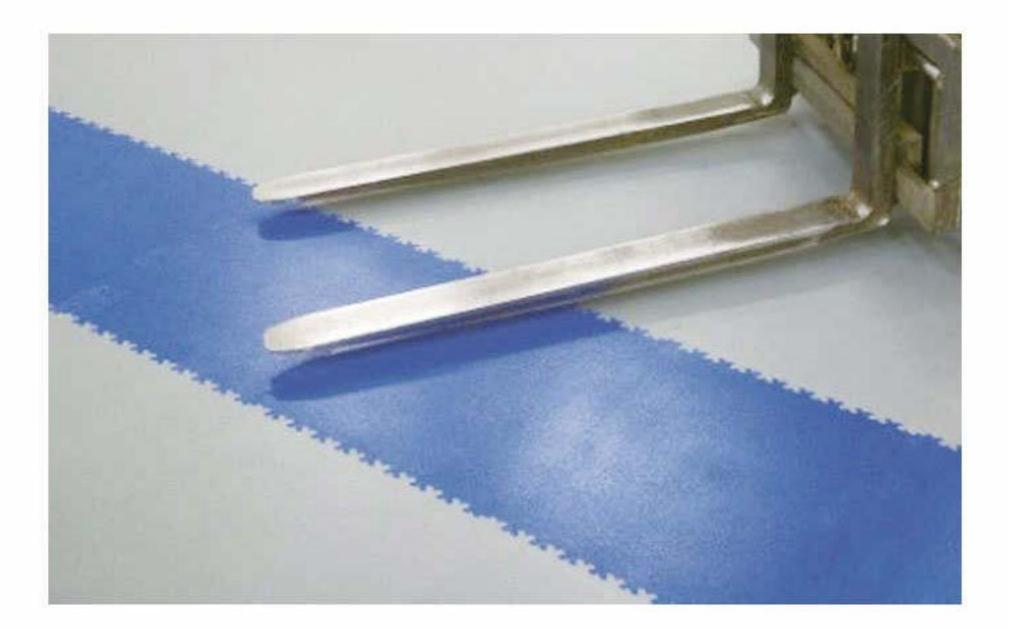



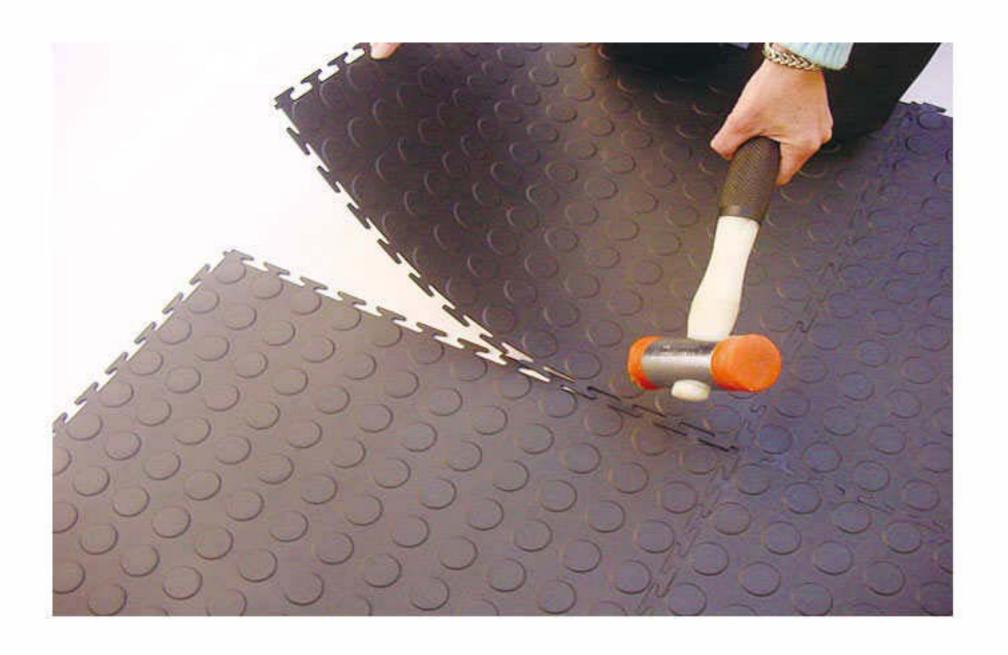










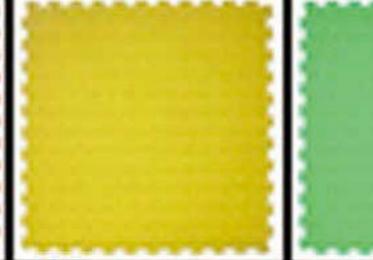




Light

Orange Yellow Green Brown



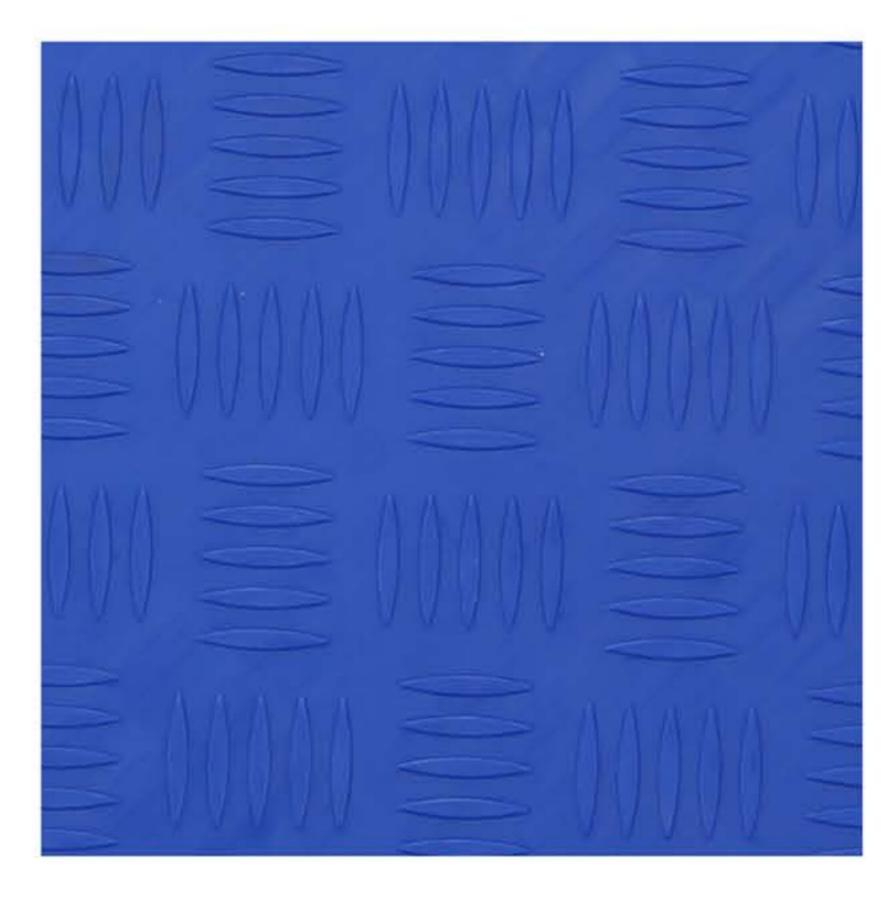


## PRODUCT CONSTRUCTION & FEATURES

PP interlocking tile is tough enough to withstand even the harshest garage environments. Transform your floor space in hours, not days with Junway's quick interlocking tile system. Unlike many other options no special tools are required for installation, there is no mess or toxic fumes and no need to repair damage to your current floor surface before installing.


Our garage floor tiles are made of the best quality 100% virgin PP. We stock a massive range of designs and colours, so the choice is yours.

Type:	JW-G300
Pattern:	Embossed
Size:	400x400mm
Thickness:	18 m m
Material:	PP
Weight:	550g
Rolling Load:	8 tons

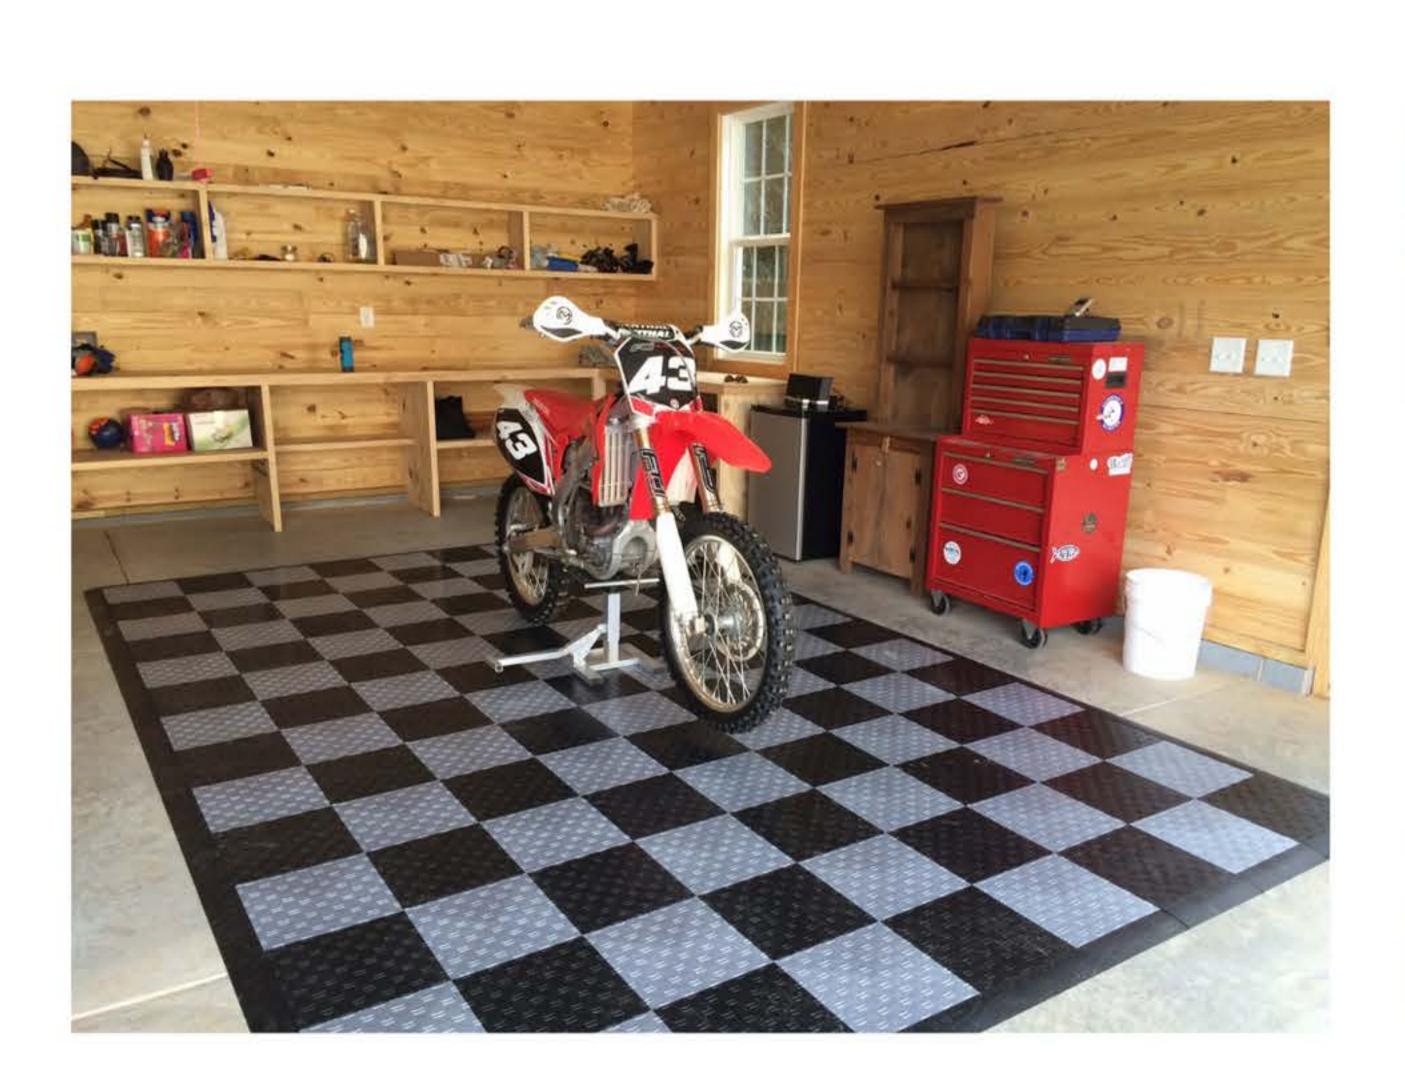








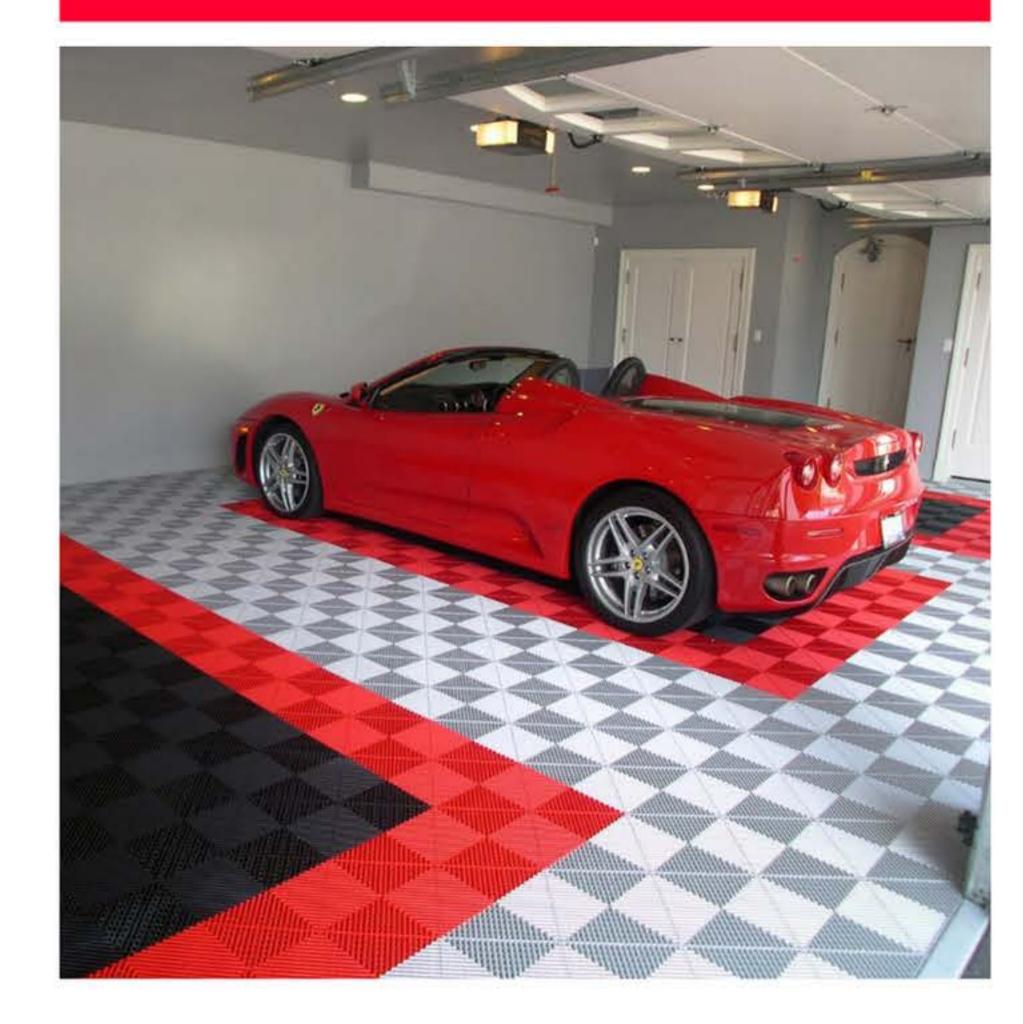



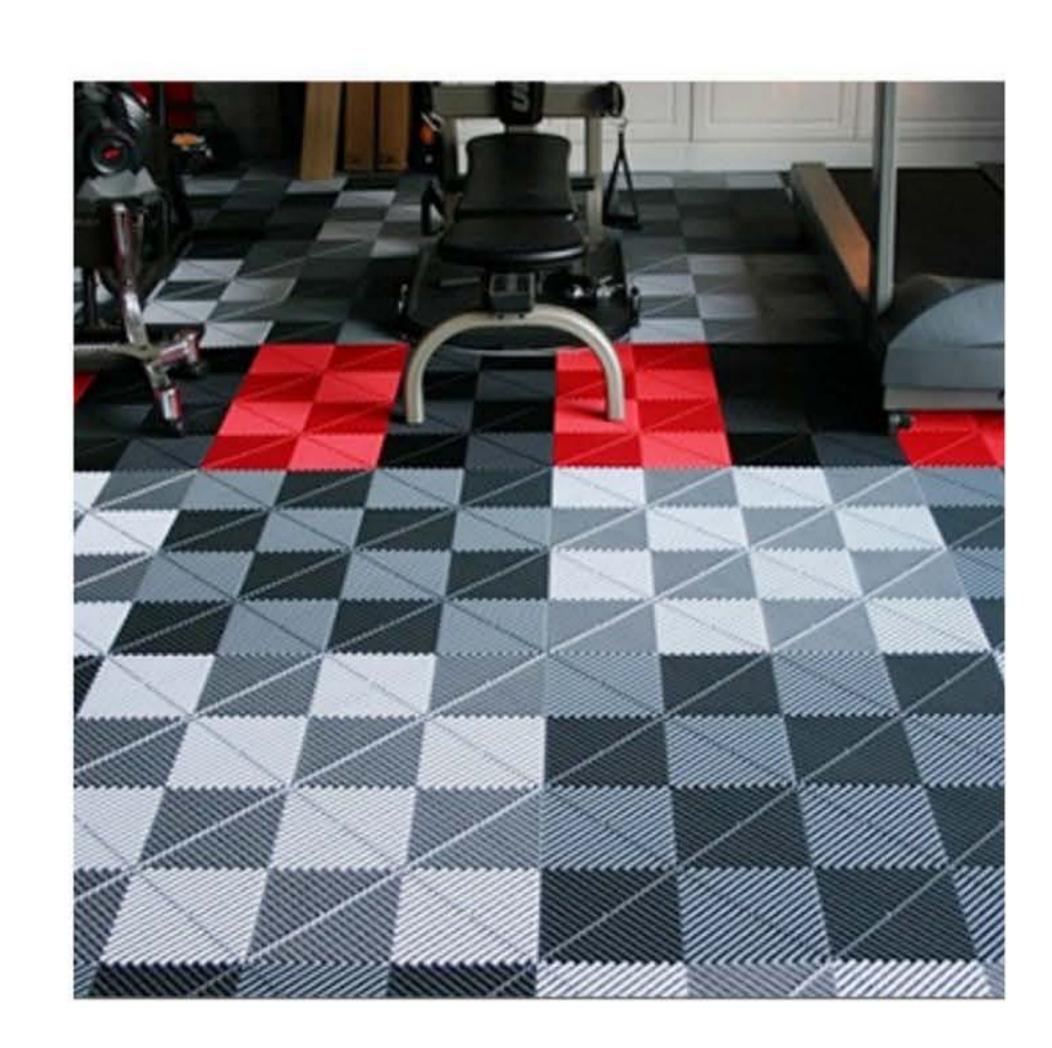

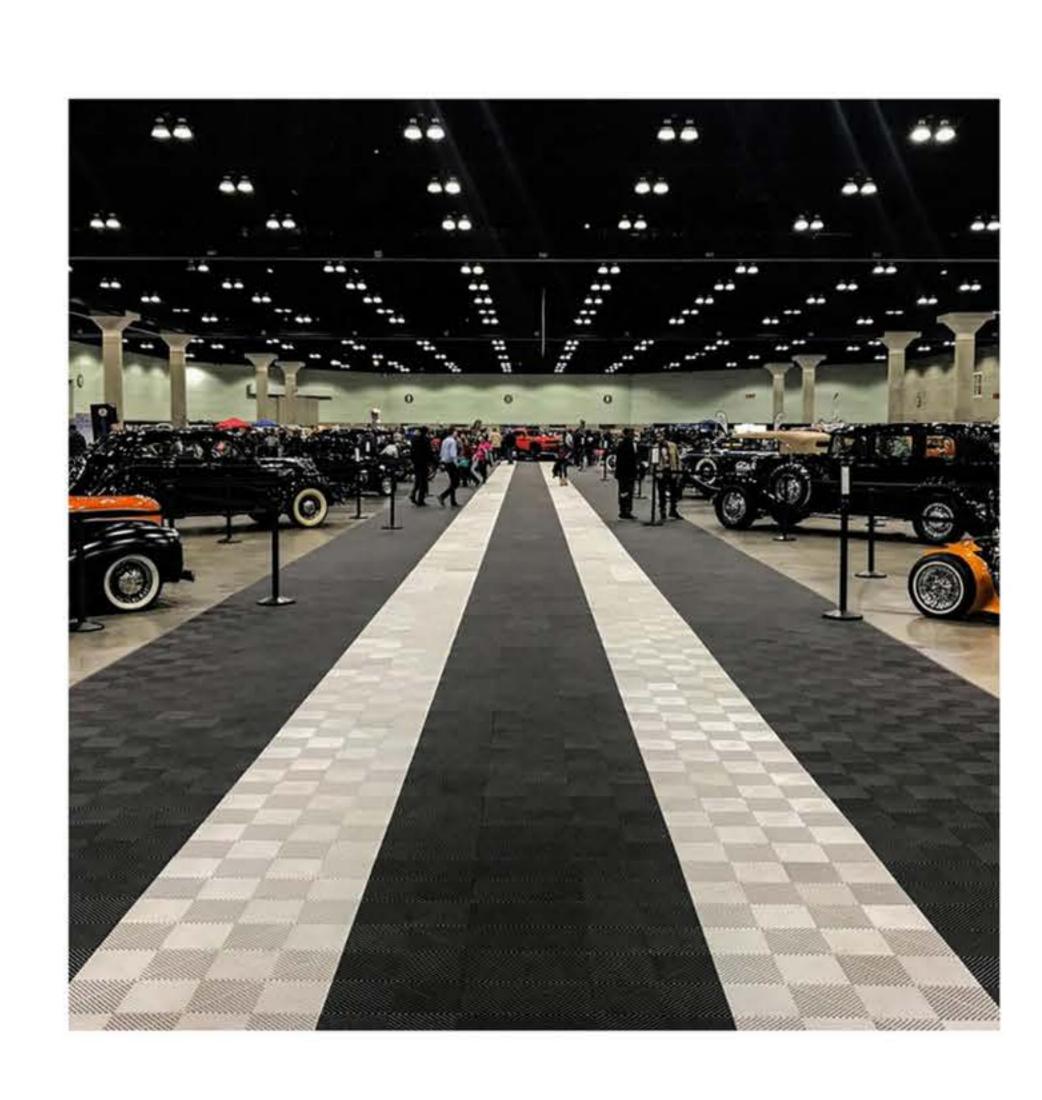

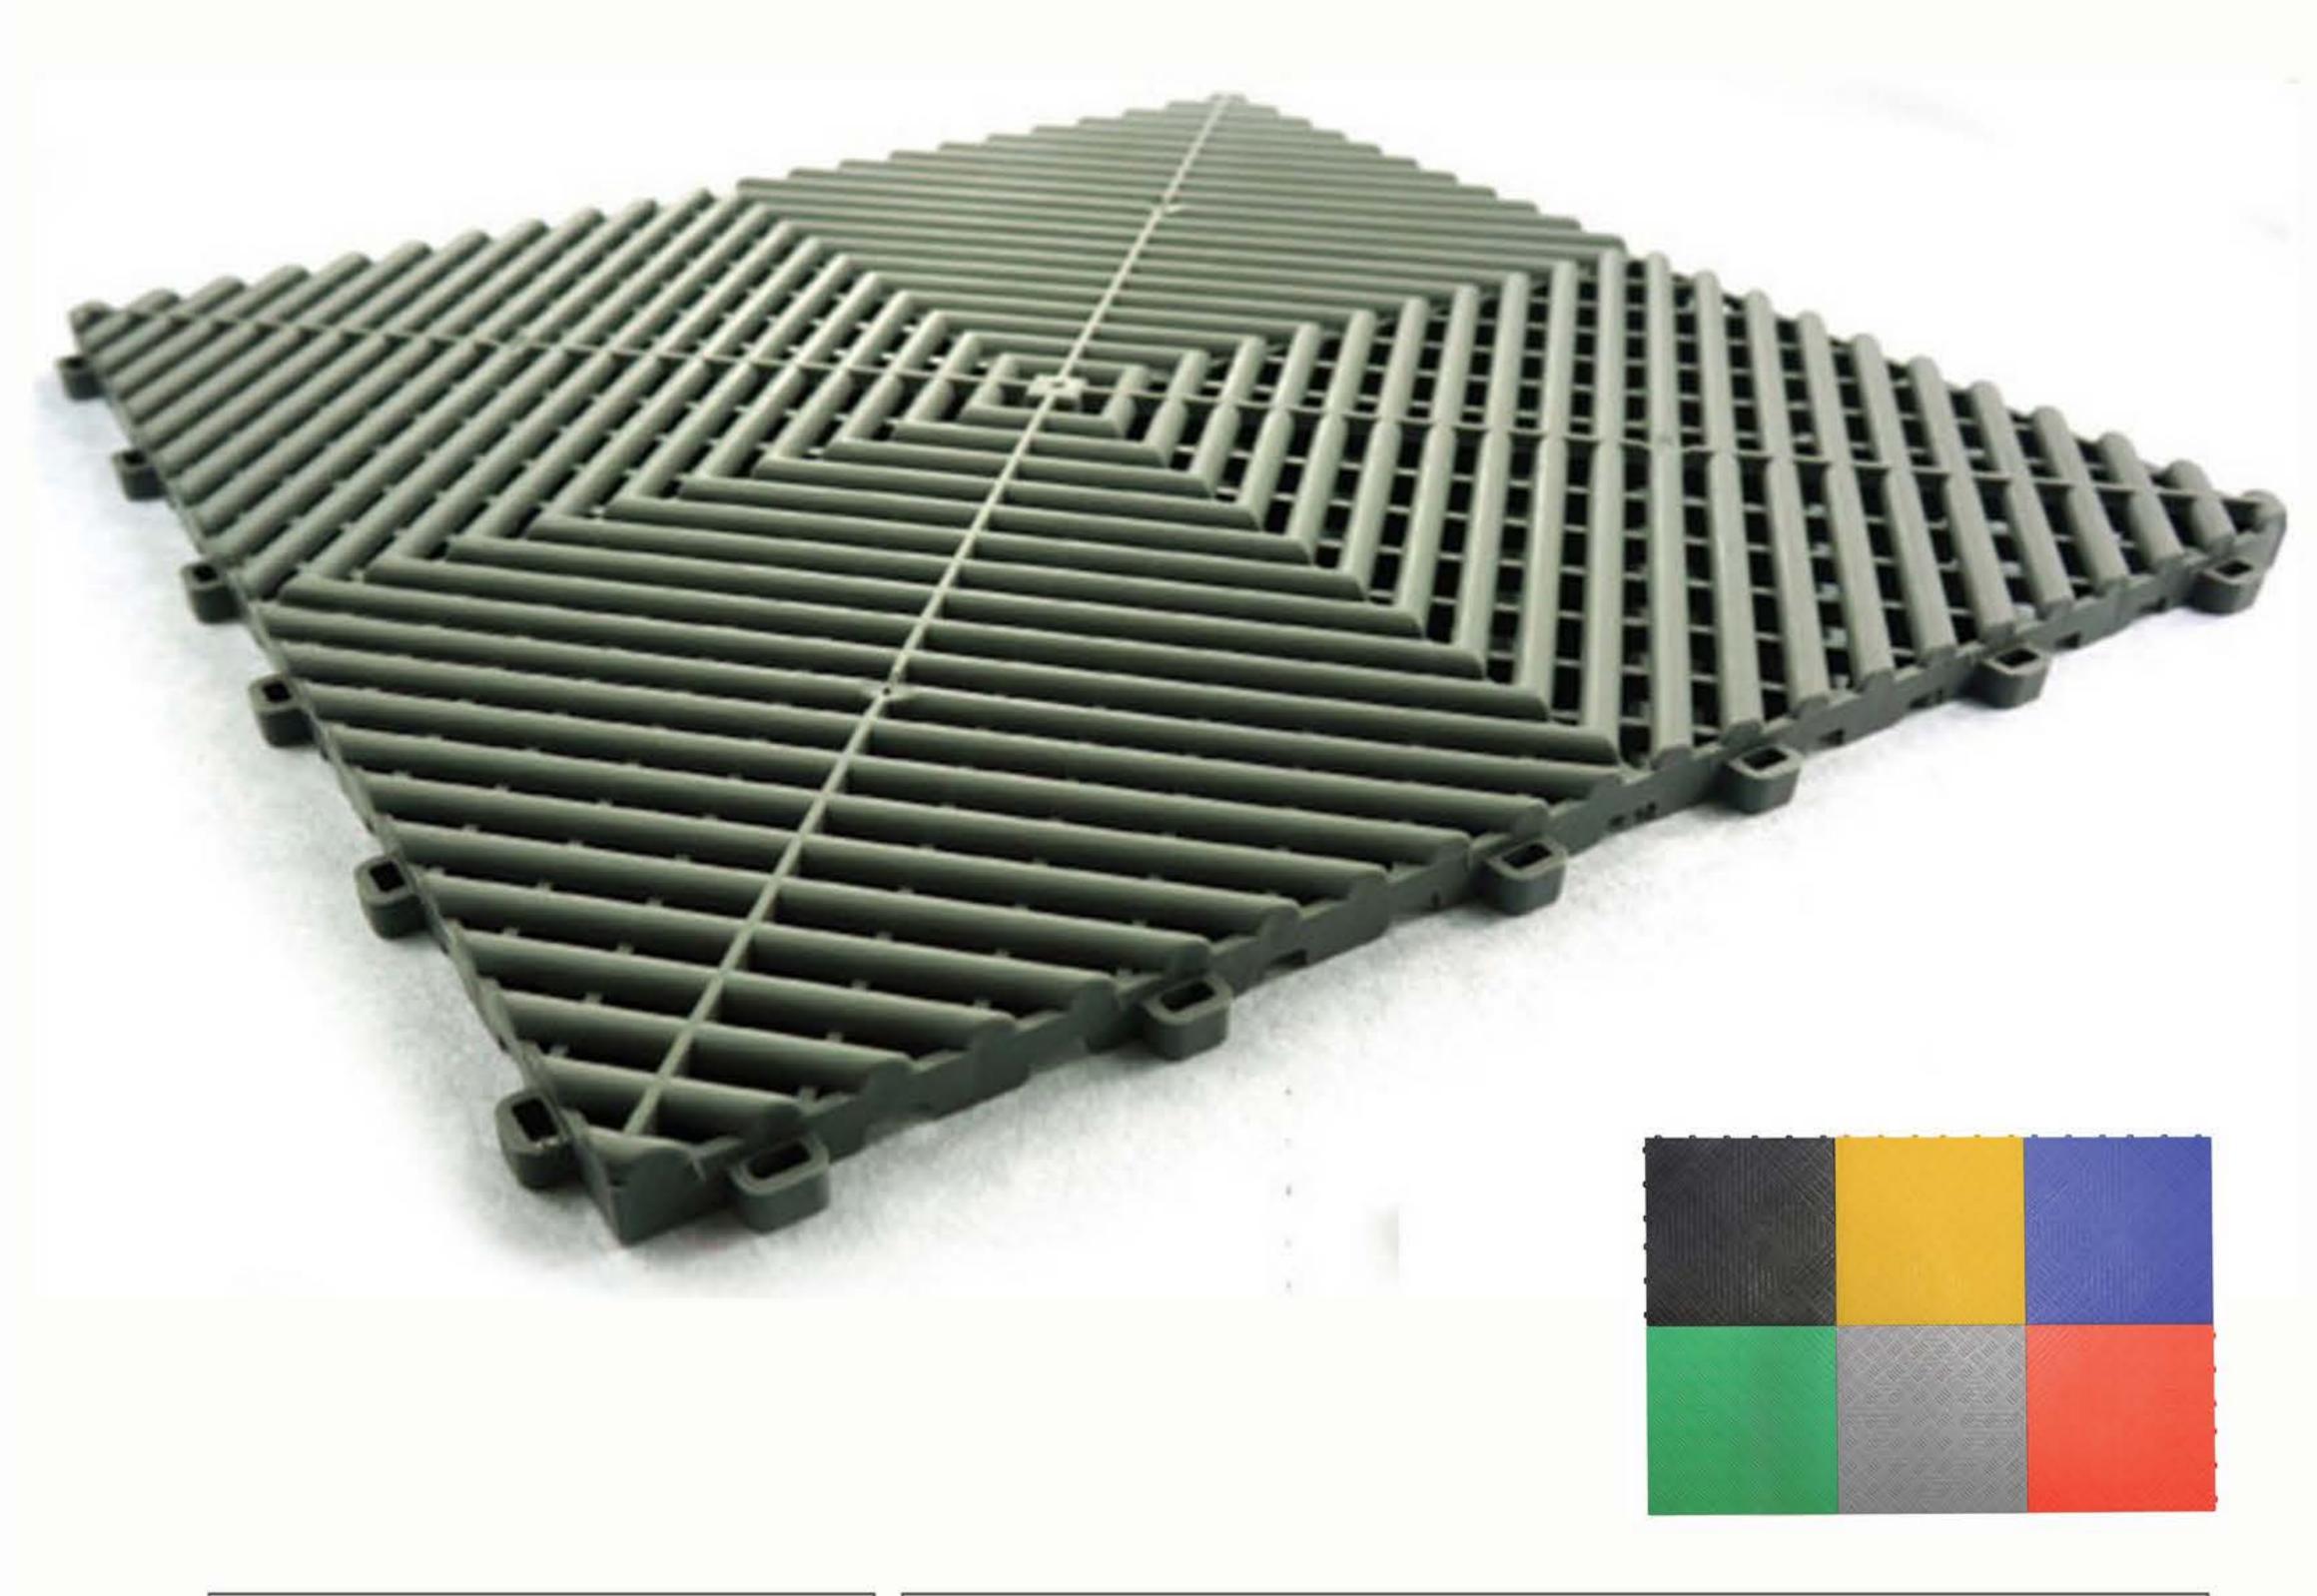



Type:	JW-G400
Pattern:	Grid
Size:	400x400mm
Thickness:	18 m m
Material:	PP
Weight:	550g
Rolling Load:	8 tons

# PRODUCT DETAILS

## Front Side

Back Side

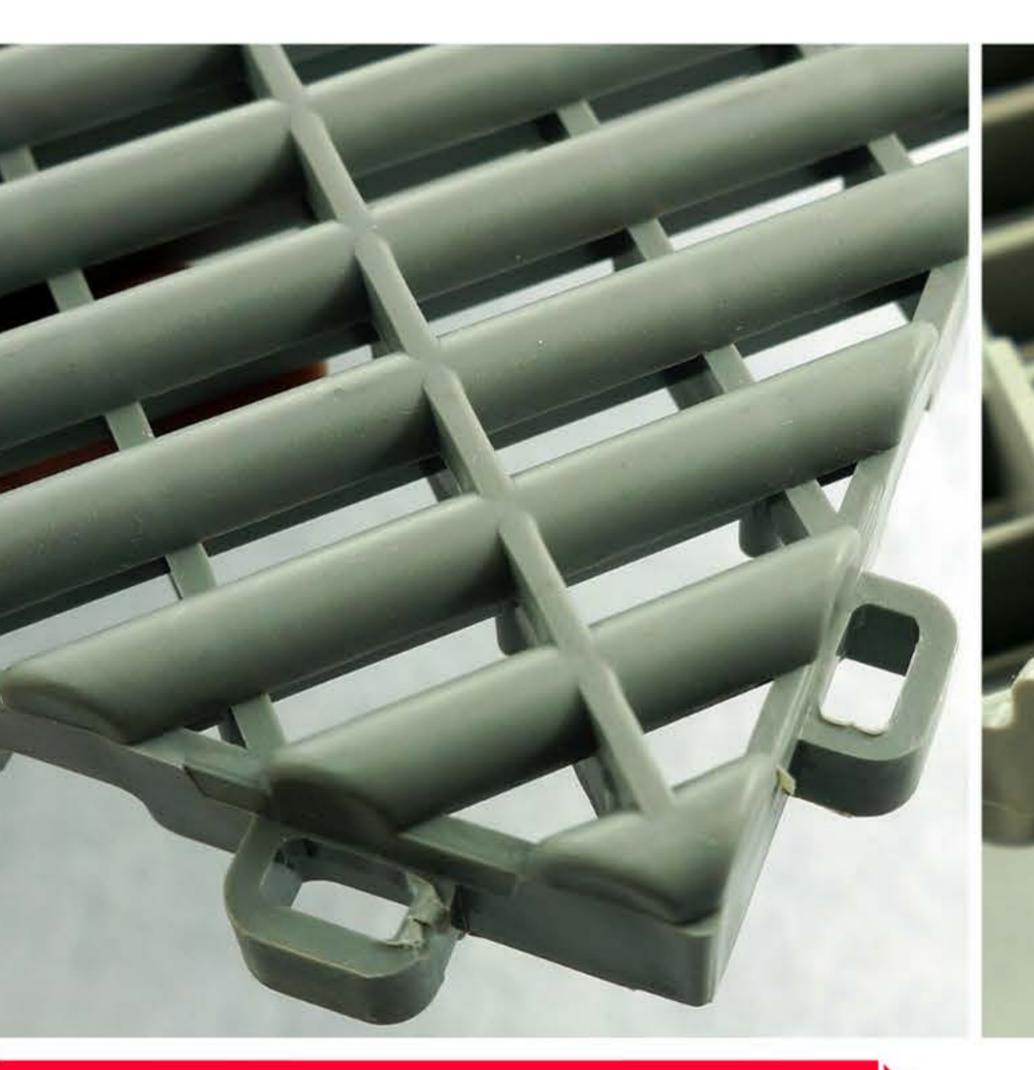

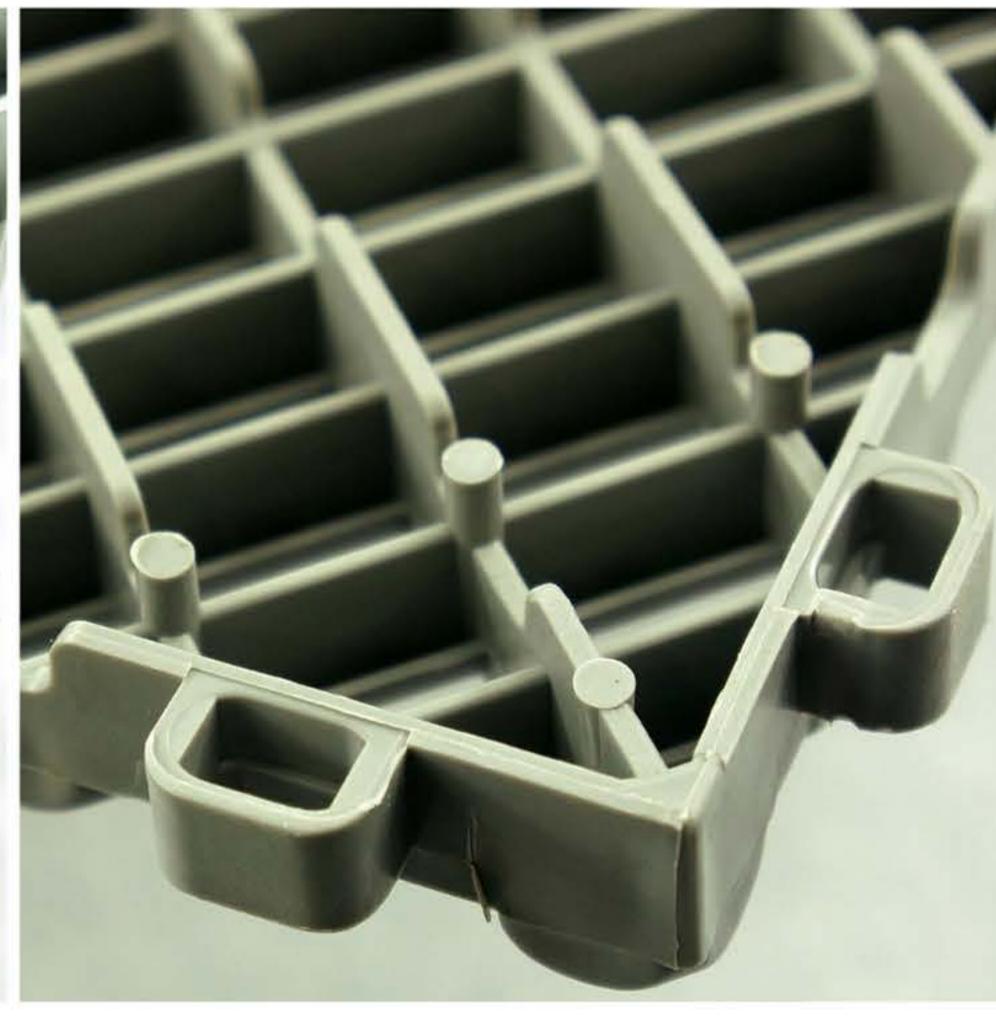

# EDGE & CORNER





Size: 400mm\*60mm

Size: 60mm\*60mm